

## Fiber Connect Panel (FCP3)

Part #	Description
FCP3-DWR	6- to 72-fiber (up to 288 fibers with MTP adapter plates) Fiber Connect Panel with sliding tray, accepts (3) Quick-Pack® adapter plates, 1U, black. Includes mounting brackets, housing/tray, fiber managers, grommets, label holders, and labels <i>height: 43.2mm (1.7 in.)</i> <i>width: 482.6mm (19 in.)</i> <i>depth: 355.6mm (14 in.)</i>
FCP3-RACK	6- to 72-fiber (up to 288 fibers with MTP adapter plates) Fiber Connect Panel with fixed tray, accepts (3) Quick-Pack adapter plates, 1U, black. Includes mounting brackets, housing/cover, fiber managers and grommet <i>height: 43.2mm (1.7 in.)</i> <i>width: 482.6mm (19 in.)</i> <i>depth: 241.3mm (9.5 in.)</i>

Note: 1U = 44.5 mm (1.75 in.)



FCP3-DWR




FCP3-RACK

## Compression Fittings

Compression fittings are utilized as an enhanced method for securing cables to FCP3 fiber enclosures. Acme threads on the body prevent skipping, allowing for faster installations of lock-nuts.

Part #	Description
CF-(XX)	Compression fitting


Use (XX) to specify fiber diameter:  
 40 = 5.8 – 13.9mm, (0.5 in.)  
 51 = 11.4 – 18.0mm (0.7 in.)  
 60 = 15.0 - 25.4mm (1 in.)



## Splice Trays (XGLO® and LightSystem®)

These aluminium trays come with a clear, snap-on polycarbonate cover and can be stacked for high-density applications. The standard tray holds up to 24 splices. The mini-tray for use with the SWIC3, accommodates up to 12 splices.

Part #	Description
TRAY-3	Standard splice tray for up to 24 fusion splices with sleeve protection. For use with RIC3 and FCP3 fiber enclosures
TRAY-M-3	Mini splice tray for up to 12 fusion splices with sleeve protection.

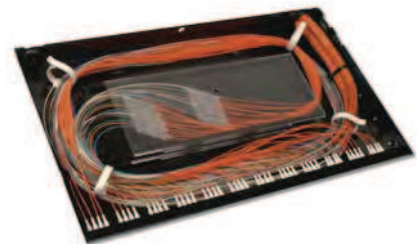

TRAY-3



TRAY-M-3

### Standard Tray Dimensions

*height: 103mm (4 in.)*  
*width: 298mm (11.7)*  
*depth: 8.13mm (0.32 in.)*

### Mini Tray Dimensions

*height: 103mm (4 in.)*  
*width: 179mm (7.04 in.)*  
*depth: 8.13mm (0.32 in.)*